



บริษัท คอนเวเยอร์ไกด์ จำกัด
CONVEYOR GUIDE CO.,LTD.

www.conveyorguide.co.th

อย่ากรู้เรื่องเงินปรึกษาธนาคาร อย่ากรู้เรื่องสายพานปรึกษาเรา

บอกทุกเรื่องที่คุณอื่นไม่อยากให้คุณรู้

HOT LINE : 090-907-6077 , 02-992-1025

HS-500B-EL-GB Technical Data Sheet





Pitch: 25mm Minimum Width: 165mm Open Area: 36% Approved: FDA Rod: Ø 5mm Flight: No Side Guard: Yes Curve: Yes	
---	--

Data

Belt Material	Belt Strength				Temperature		Belt Weight
	Straight		Curve		℃ (min.)	℃ (max.)	(Kg/M ²)
	Kg/M(BW)	N/M(BW)	Kg/M(BW)	N/M(BW)			
Polypropylene	1060	10600	676	6760	1	70	5.8

BW – Belt Width

BW – Belt Width

Color Table

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●																		

W-White, G-Gray, N-Nature, DB-Dark brown, B-Blue

Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

SUS – Stainless Steel


Equivalent type with other Brand

Brand Name	Intralox	UNI	Rexnord	MCC	Habasit	KVP
Series & Type	2200	SNB	1200		M2500	610
	2400		7956		M3800	

The above content is only for reference.

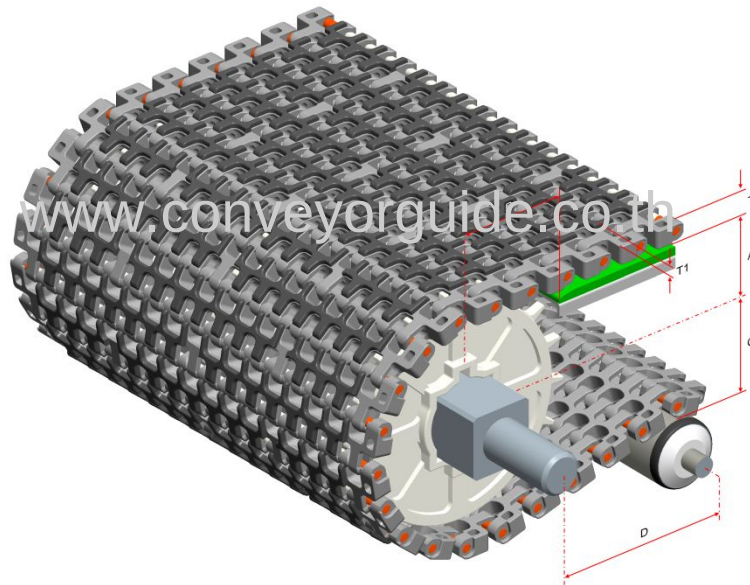

Conveyor Frame Dimensions						Unit : mm
No. Teeth	A (Min.)	B (Min.)	C (Max.)	D (Min.)	T	T1
12	41	52	57.5	250	11	4.5
18	74	60	83	250		
24	89	100	106.5	300		

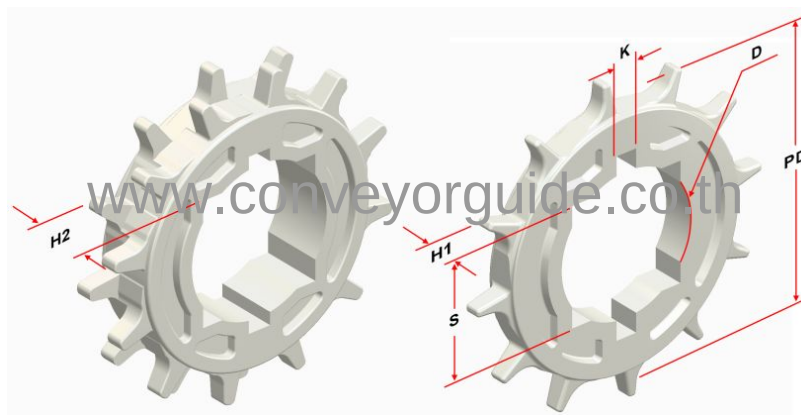


Sprocket Dimensions				Unit: mm		
No. Teeth	PD	S	D	H1	H2	K
12	93	38.5	45.5	10.5	-	7X7
18	145	38.5	45.5	10.5	-	7X7
24	190	60	-	30	-	7X7




12-2R	93	40.5	45.5	-	20	8x8
15-2R	120	40.5	45.5	-	20	8x8
18-2R	145	40.5	45.5	-	20	8x8
24-2R	190	60	-	-	35	8x8

Design Guide Summary

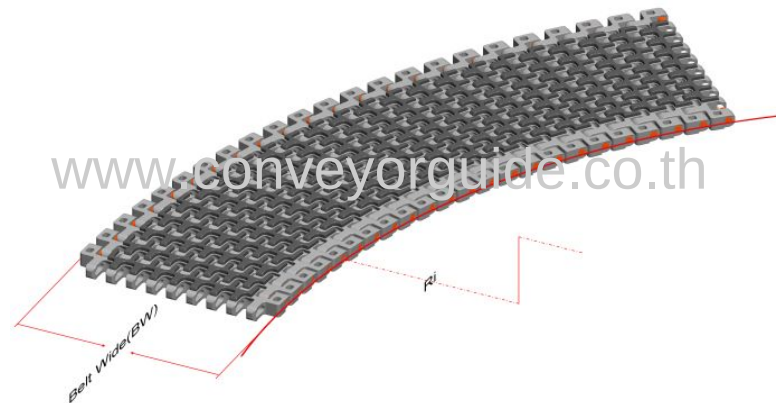

- The minimum turning radius (inside) is 2.2 times of belt width under all feasible belt Width, 2.5 times of belt width is the most optimal.
- The minimum straight run section near driving shaft and idling shaft of Radius belt must be 2 times of the belt width in length.
- The minimum straight run section between two turns of opposing direction must be 2 times of the belt width in Length.

Guide Rail & Wear Strips

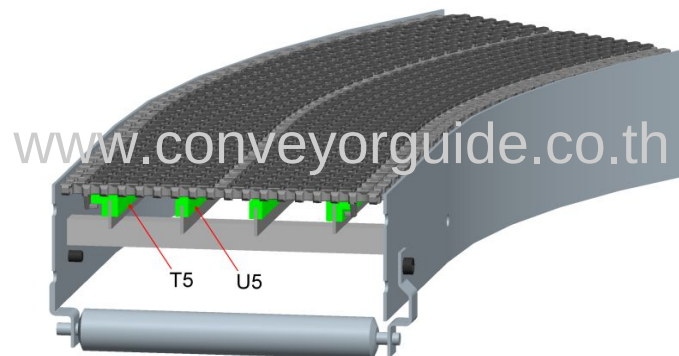

- We have different kinds of guide rail and wear strips for your choice; for more information, please consult our sales team.