



บริษัท คอนเวเยอร์ไกด์ จำกัด
CONVEYOR GUIDE CO.,LTD.


www.conveyorguide.co.th

อยากรู้เรื่องเงินประกันธนาคาร อยากรู้เรื่องสายพานปรึกษาเรา

บอกทุกเรื่องที่คุณคนอื่นไม่อยากให้คุณรู้

HOT LINE : 090-907-6077 , 02-992-1025

HS-900C Technical Data Sheet

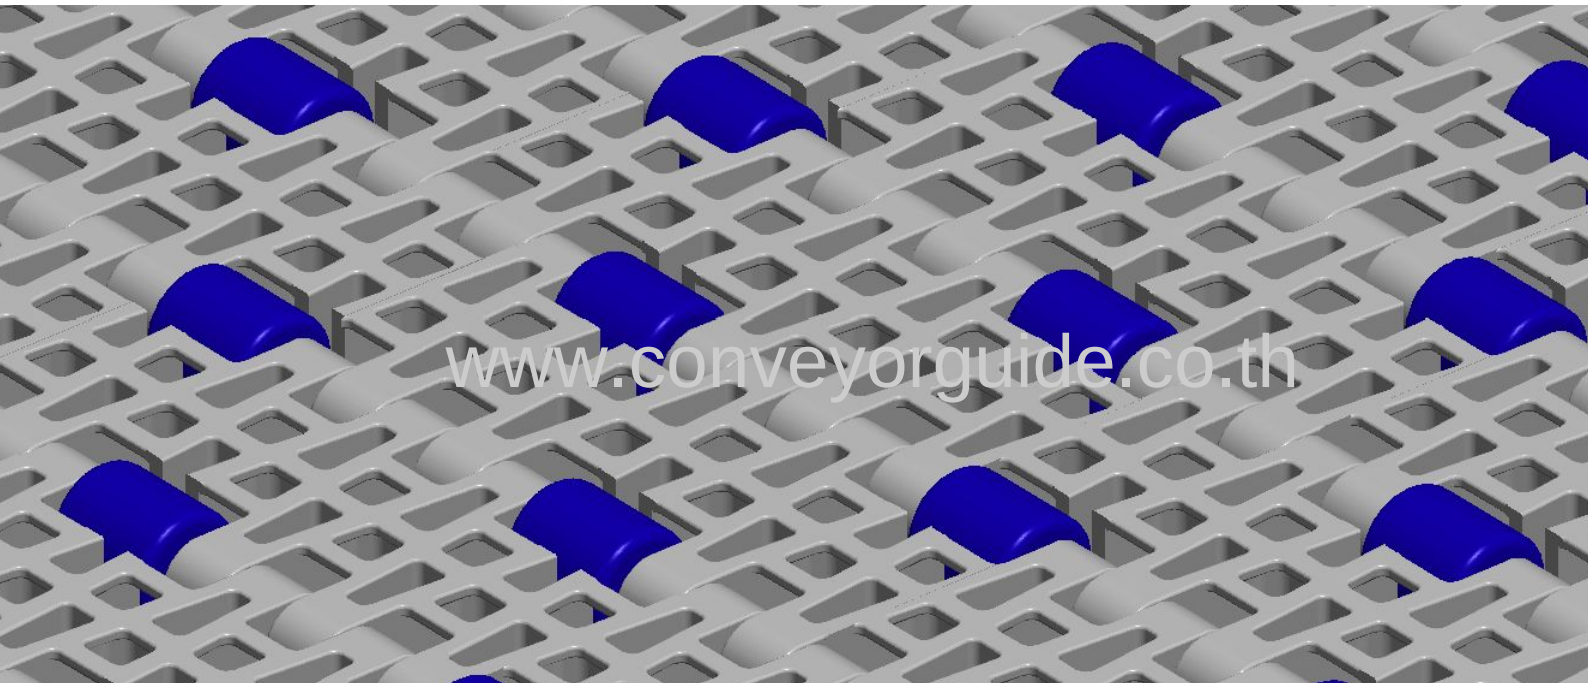



Pitch: 50.8mm Minimum Width: 150mm Open Area: 34% Approved: FDA Rod: Ø 6mm Flight: No Side Guard: No Curve: No	
---	--

Data

Belt Material	Belt Strength Kg/M (BW)		Temperature		Belt Weight (Kg/M ²)
	Straight	Curve	°C (min.)	°C (max.)	
Polypropylene	2745	--	1	100	6.6
Polyethylene	2610	--	-60	60	7.4
Acetal	3090	--	-40	80	9.5
Nylon	2400	--	1	180	8.5

BW – Belt Width

Color Table

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●																		

W-White, G-Gray, N-Nature, DB-Dark brown, B-Blue

Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

SUS – Stainless Steel


Equivalent type with other Brand

Brand Name	Intralox	UNI	Rexnord	MCC	Easecon	Habasit	KVP	Regina
Series & Type	400	OPB	2000		100	5000		
	200	L-SNB	6390			5100		
	800/850	MPB	2010					

The above content is only for reference, match or not, please make your own judgment.

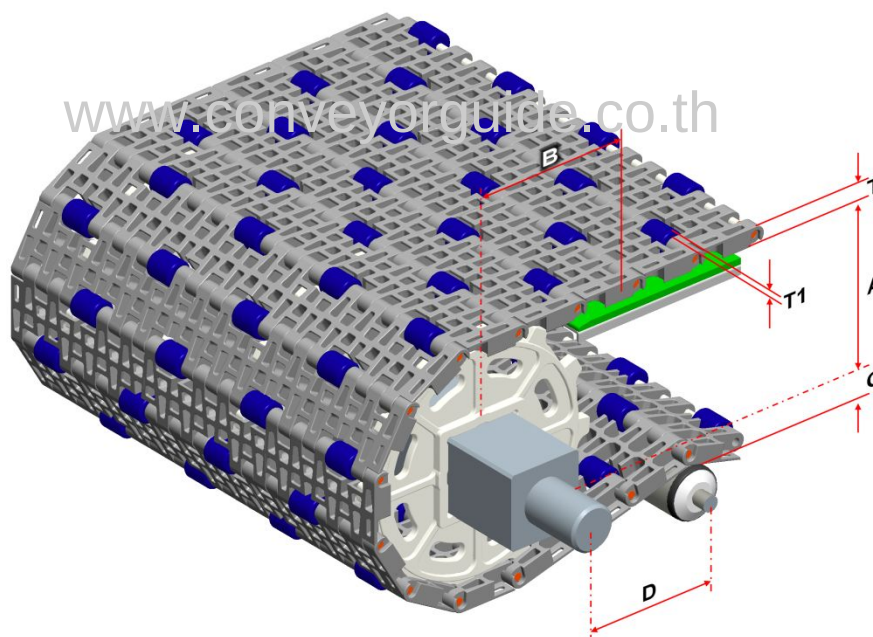

Conveyor Frame Dimensions						Unit : mm
No. Teeth	A (Min.)	B (Min.)	C (Max.)	D (Min.)	T	T1
6	39	58	50	250	14	3
9	65.5	60	75	250		
12	90	65	100	300		

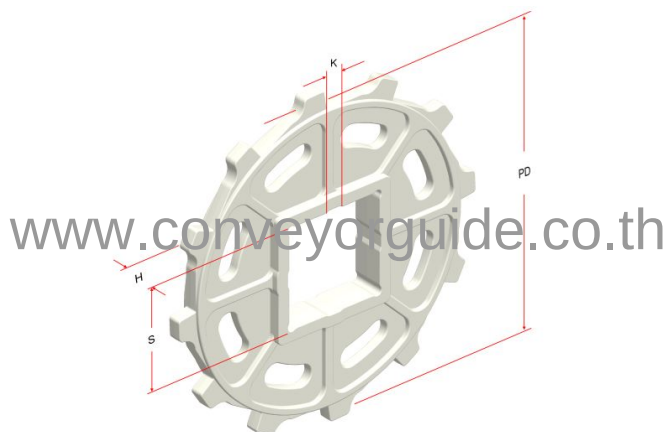

Sprocket Dimensions			Unit: mm		
No. Teeth	PD	S	D	H	K
6	101.5	38.5	--	20	7X7
9	148.5	38.5*	--	12	8X8
12	196	60.5	--	12	--

S *--double rows square bore of sprocket is 40.5X40.5 mm.