



บริษัท คอนเวเยอร์ไกด์ จำกัด
CONVEYOR GUIDE CO.,LTD.

www.conveyorguide.co.th


อยากรู้เรื่องเงินประกันธนาคาร อยากรู้เรื่องสายพานปรึกษาเรา

บอกทุกเรื่องที่คุณคนอื่นไม่อยากให้คุณรู้

HOT LINE : 090-907-6077 , 02-992-1025

HS-1400B Technical Data Sheet



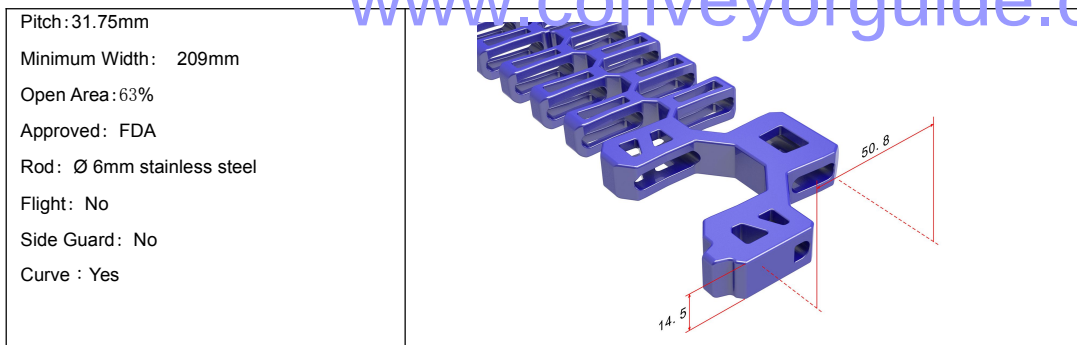

Data

Belt Material	Belt Strength Kg/M (BW)		Temperature		Belt Weight (Kg/M ²)
	Straight	Curve	°C (min.)	°C (max.)	
Acetal	680	340	-45	80	8.7

BW – Belt Wide

Color Table


Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●			●	●					

W-White, G-Gray, N-Nature, DB-Dark brown, B-Blue

Friction Table

Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28


SUS – Stainless Steel

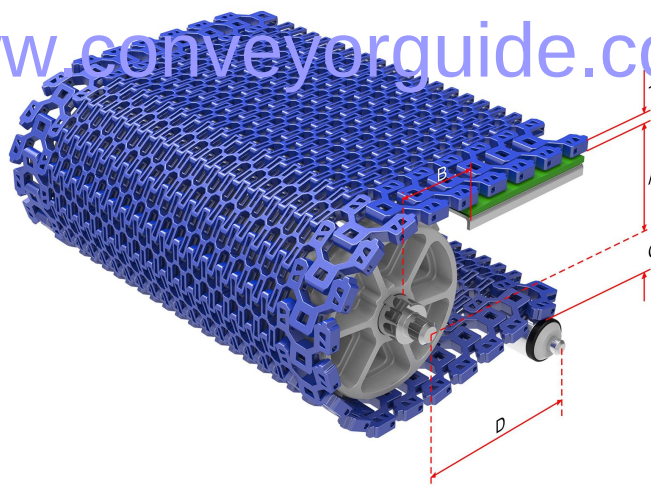




Conveyor Frame Dimensions					Unit : mm
No. Teeth	A (Min.)	B (Min.)	C (Max.)	D (Min.)	T
13	96	90	110	250	14.5

www.conveyorguide.co.th

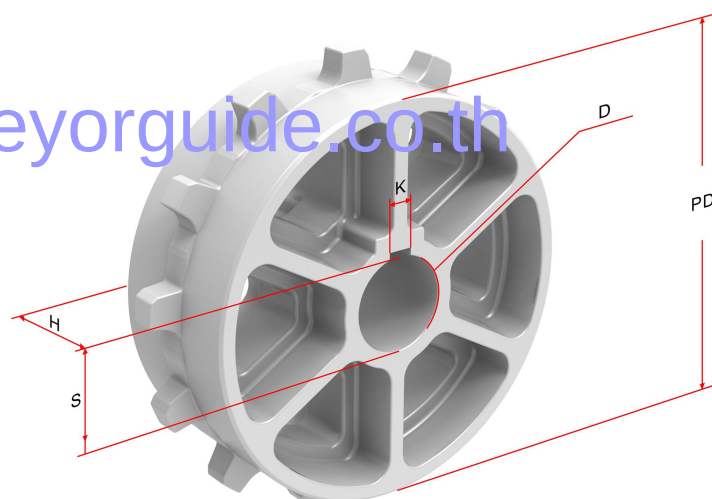

Sprocket Dimensions			Unit: mm		
No. Teeth	PD	S	D	H	K
13	212	--	45.2	76.2	12x8


www.conveyorguide.co.th

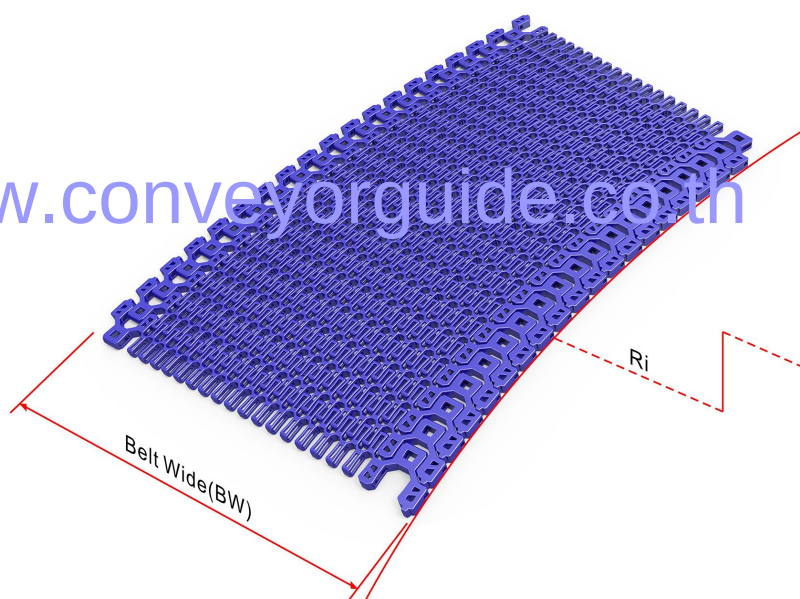




- The minimum turning radius (inside) is 2 times of belt width under all feasible belt Width, 2.5 times of belt width is the most optimal.
- The minimum straight run section near driving shaft and idling shaft of Radius belt must be 2 times of the belt width in length.
- The minimum straight run section between two turns of opposing direction must be 2 times of the belt width in Length.



Guide Rail & Wear Strips

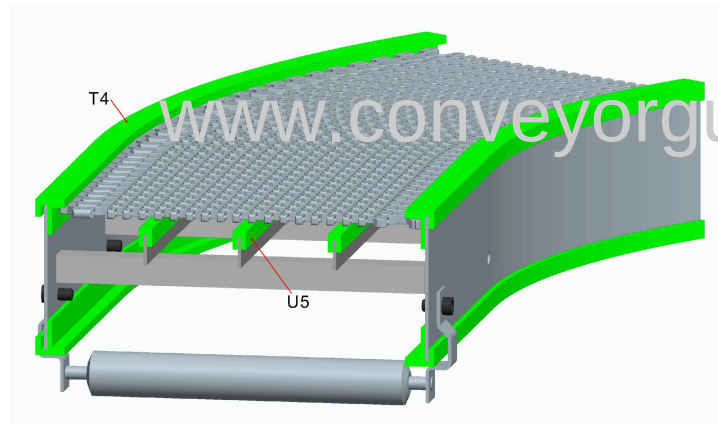

- We have different kinds of guide rail and wear strips for your choice; for more information, please consult our sales team.

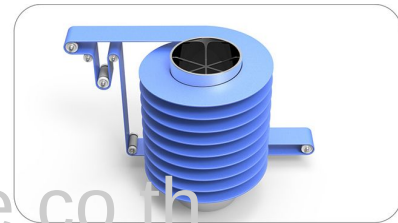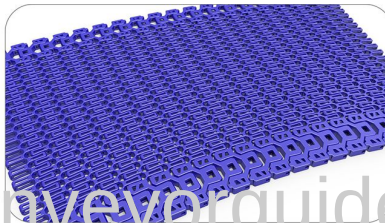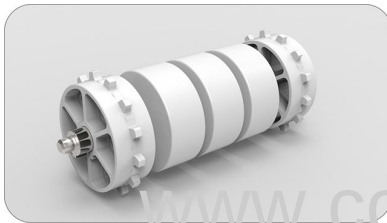

A: Conveyor Belt
B: Drive Sprocket
C: Dancer Roller 200mm(min)
D: Sprocket 150mm(min)
 $C=D_1=D_2$

