



บริษัท คอนเวเยอร์ไกด์ จำกัด  
**CONVEYOR GUIDE CO.,LTD.**

[www.conveyorguide.co.th](http://www.conveyorguide.co.th)

อยากรู้เรื่องเงินปรึกษาธนาคาร อยากรู้เรื่องสายพานปรึกษาเรา

บอกทุกเรื่องที่คุณอื่นไม่อยากให้คุณรู้

HOT LINE : 090-907-6077 , 02-992-1025

## HS-2000A Technical Data Sheet





[www.conveyorguide.co.th](http://www.conveyorguide.co.th)

Fixed Radius: 600mm	
Minimum Width: 200mm	
Open Area: 0%	
Approved: FDA	
Rod: Ø 4.5mm	
Flight: No	
Side Guard: No	
Curve : Yes	

**Data**

Belt Material	Belt Strength	Temperature	
	Curve Kg/M (BW)	°C (min.)	°C (max.)
Polypropylene	1600	1	100
Polyethylene	1550	-60	60
Acetal	2640	-40	80
Nylon	2230	1	180

**BW – Belt Width**


**Color Table**

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●				●				●	

W-White, G-Gray, N-Nature, DB-Dark brown, B-Blue

**Friction Table**

Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

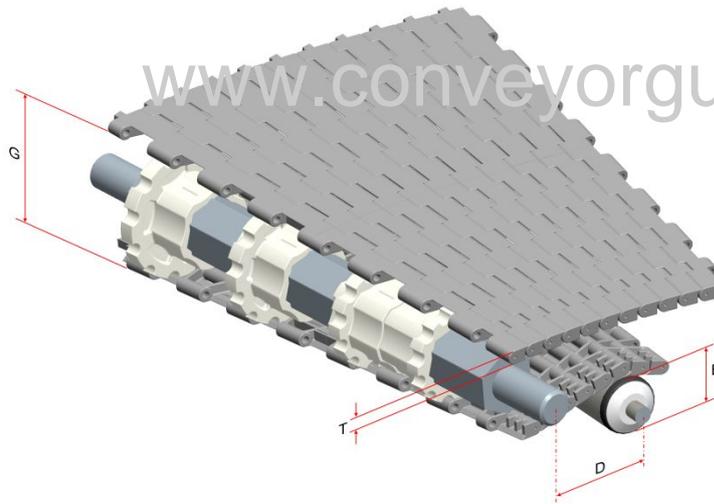


Unit : mm				
No. Teeth	D ( Min.)	E ( Min.)	G	T
12	200	40	5.6°	10



Sprocket Dimensions							Unit: mm
Belt Width	Sprocket No.	PD	S	A	B	C	H
200	1	65	41.5	35	0	11	46
	2	72		10	29		50
400	3	82		10	29		
	4	92		10	29		
600	5	101		10	29		
	6	111		10	29		
800	7	121		10	29		
	8	130		10	29		
1000	9	140		10	29		
	10	150		10	29		



### Installation of sprockets

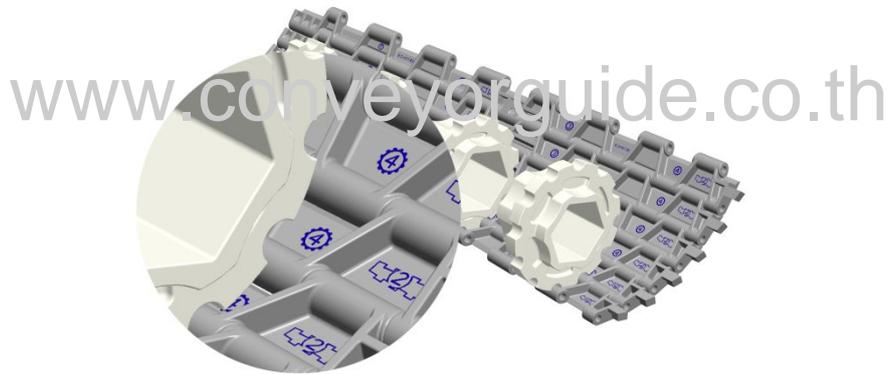

Please install the sprockets according to the graphical representation.

### HS-2000A Flat Top Radius Modular Conveyor Belt

HS-2000 Flat Top Radius Modular Conveyor Belt is developed specially for logistics transportation by HONGSBELT. The inside turning radius of HS-2000 is 600mm, it is fixed and doesn't change with the width change. Width of HS-2000 is range from 200mm to 1000mm (200mm, 400mm, 600mm, 800mm and 1000mm) Max width is 1000mm, which can meet the wide range of requirements of logistics transportation.

### Driving Mode of HS-2000A

For turning conveyors installed with traditional PVC conveyor belt, the belt is fixed with unstable bearing parts, so the lift time of it is very short and the structure of the conveying machine is large; At the same time, the belt is drive by smooth roller, so it is easy to slip, which causes the low tension force and usually affects the production.

HS-2000A Flat Top Radius Modular Conveyor Belt is designed with module structure, and is drive by sprockets, which solve the slip of belt and ensure the belt in most stable condition in operation.

The bore of HS-2000A sprocket is 41.5mm hexagon, it can be matched with 41mm standard hexagonal shaft, so it is easy to get and process the raw material, more importantly, this design solves the chordal action of quadrilateral shaft and brings more stable operation.

### Advantages of HS-2000 A

HS-2000A Flat Top Radius Modular Conveyor Belt is stable in operation, and because of its fixed structure design, straight sections are not need in driving end, which save the manufacturing cost and the space of conveying system.

HS-2000 A Flat Top Radius Modular Conveyor Belt is made from Acetal, it can endure instant impact with low friction coefficient and high impact resistance, tensile strength of it is 10 times stronger than common radius PVC Conveyor belt.

HS-2000 A Flat Top Radius Modular Conveyor Belt is drive by sprockets, and can endure instant high-speed and big



load capacity. It is widely used in Paper, Printing, Beverage, packaging industry etc. both for light-duty and heavy-duty conveying.

### Guide Rail & Wear Strips



- We have different kinds of guide rail and wear strips for your choice; for more information, please consult our sales team.