



บริษัท คอนเวเยอร์ไกด์ จำกัด
CONVEYOR GUIDE CO.,LTD.


www.conveyorguide.co.th

อยากรู้เรื่องเงินปรึกษาธนาคาร อยากรู้เรื่องสายพานปรึกษาเรา

บอกทุกเรื่องที่คุณอื่นไม่ยอมให้คุณรู้

HOT LINE : 090-907-6077 , 02-992-1025

HS-800 2C Technical Data Sheet

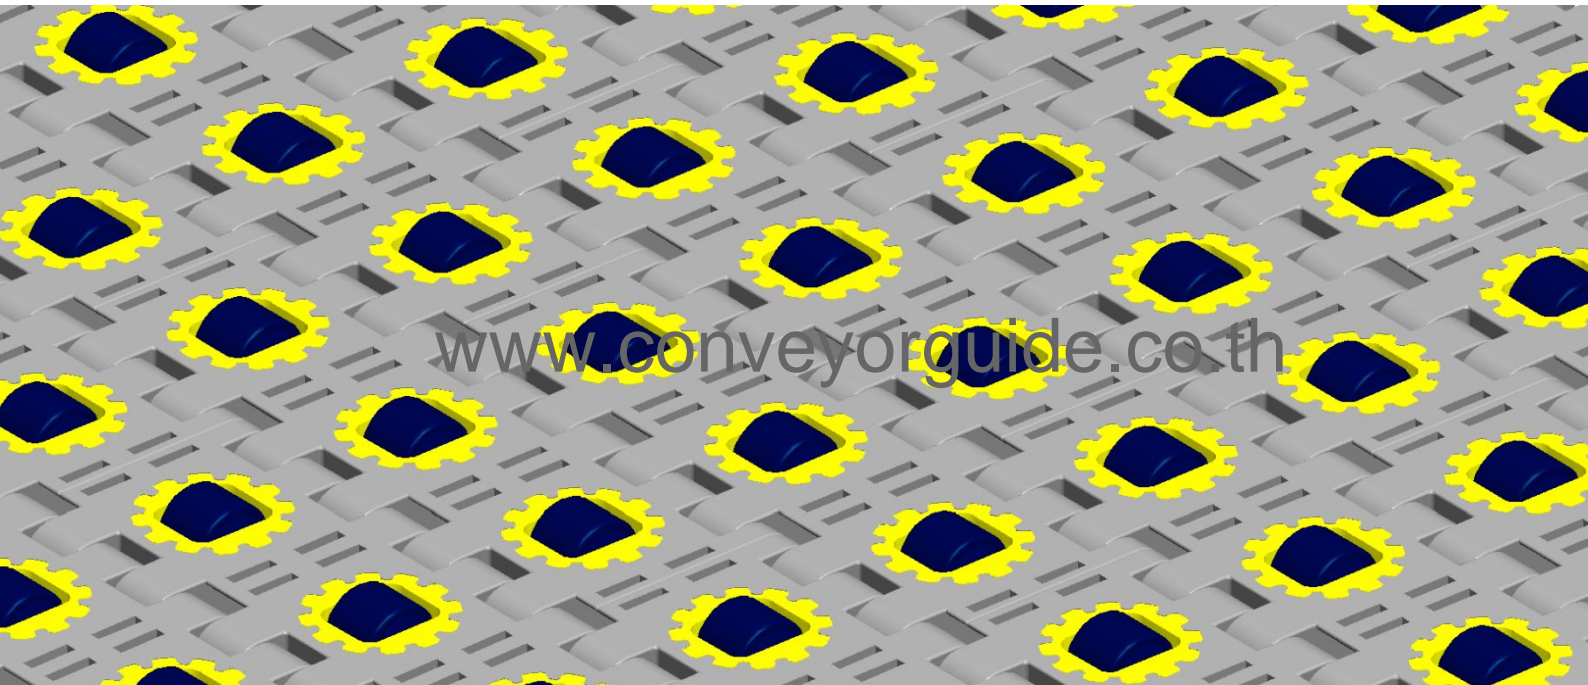



Pitch: 50.8mm Minimum Width: 288mm Open Area: 8% Approved: FDA Rod: Ø 6mm Flight: No Side Guard: No Curve: No	
--	--

Data

Belt Material	Belt Strength Kg/M (BW)		Temperature		Belt Weight (Kg/M ²)
	Straight	Curve	°C (min.)	°C (max.)	
Polypropylene	4380	--	1	100	9.8

BW – Belt Width

Color Table

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●																		

W-White, G-Gray, N-Nature, DB-Dark brown, B-Blue

Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

SUS – Stainless Steel


Equivalent type with other Brand

Brand Name	Intralox	UNI	Rexnord	MCC	Easecon	Habasit	KVP	Regina
Series & Type	400							
	-							
	-							

The above content is only for reference.

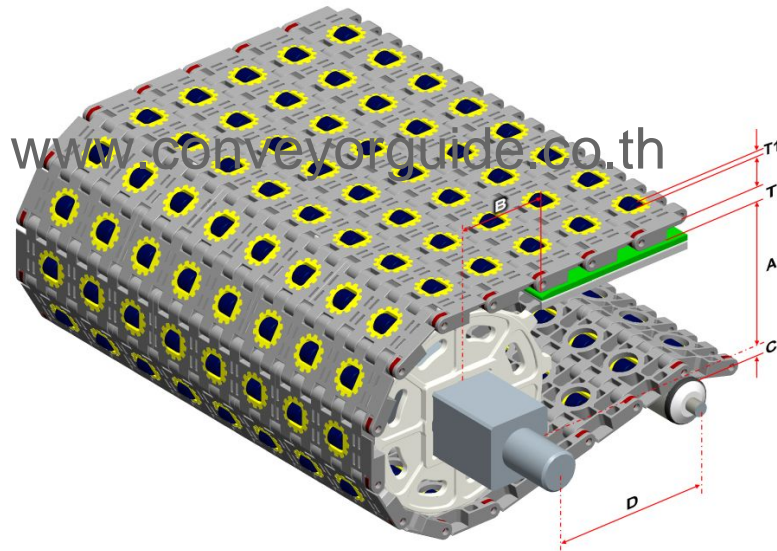

Conveyor Frame Dimensions					Unit : mm	
No. Teeth	A (Min.)	B (Min.)	C (Max.)	D (Min.)	T	T1
6	39	58	50	250	14	4
9	65.5	60	75	250		
12	90	65	100	300		

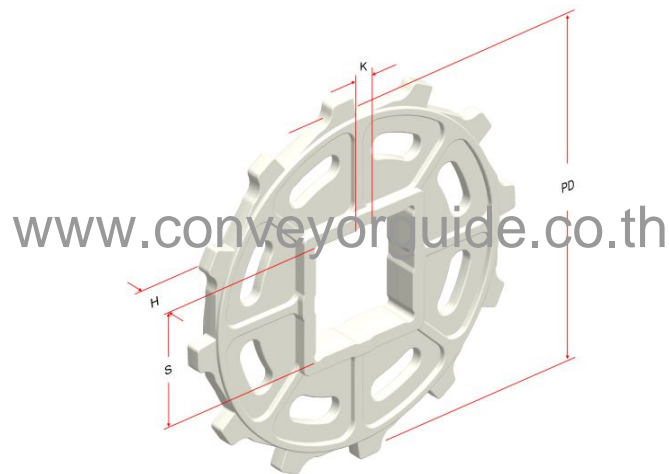

Sprocket Dimensions					Unit: mm
No. Teeth	PD	S	D	H	K
6	101.5	38.5	--	20	7X7
9	148.5	38.5*	--	12	8X8
12	196	60.5	--	12	--

S*--double rows square bore of sprocket is 40.5X40.5 mm.